



P10 Barrier Gate Series

P10 series is the latest generation of ZKTeco self-developed barrier gate, it adopts high performance DC brush motor and the fastest opening / closing speed is up to 1s. Without spring design and change direction easily are the greats highlight of this barrier, it means, there is no need to adjust spring anymore and easy for stock. It is high performance and high stability and Maintenance free barrier gate and is great choice for parking entrance and exit management.


Features

- Without spring design, when change the boom length, no need adjust spring any more
- Easy for change direction, the direction of the boom can be changed on site, and convenient for stock
- While closing, boom will return to vertical position when encounters blockage, which will protect the vehicle or person
- Splice boom design, easy for transport and reduce the transport cost
- Support open / close speed adjustable
- Support delay automatic closing
- Support DC 24V battery power supply
- Humanized LED is built into the chassis to indicate the switching state


Parameters


Model	P10	
Opening / Closing Speed	1.0s	1.5s
Boom Length (Max Support)	3m	4m
Length of boom packing	< 3m	
Boom Type	Splice Boom	
Boom default Direction	The chassis on left, the boom arm on right	
MCBF	2 millions	
Remote Distance	≥30m	
Power Supply	110V / 220V AC	
Working Voltage	24V DC	
Power Consumption	60W	
Temperature Range	-35°C ~ +75°C	
Chassis Size	298 * 278 * 927mm	
Weight	30kg	

Dimensions(mm)

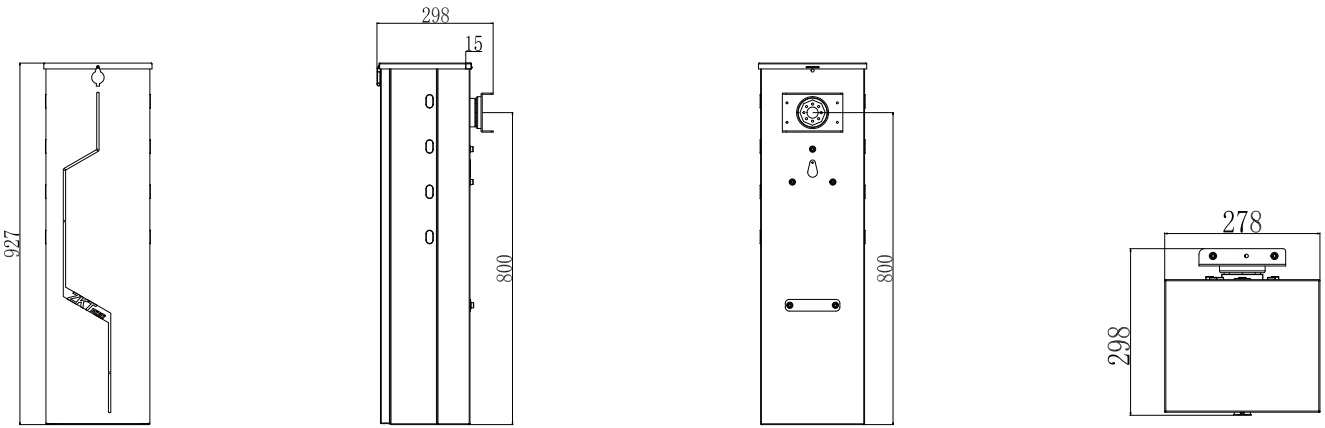

System Products

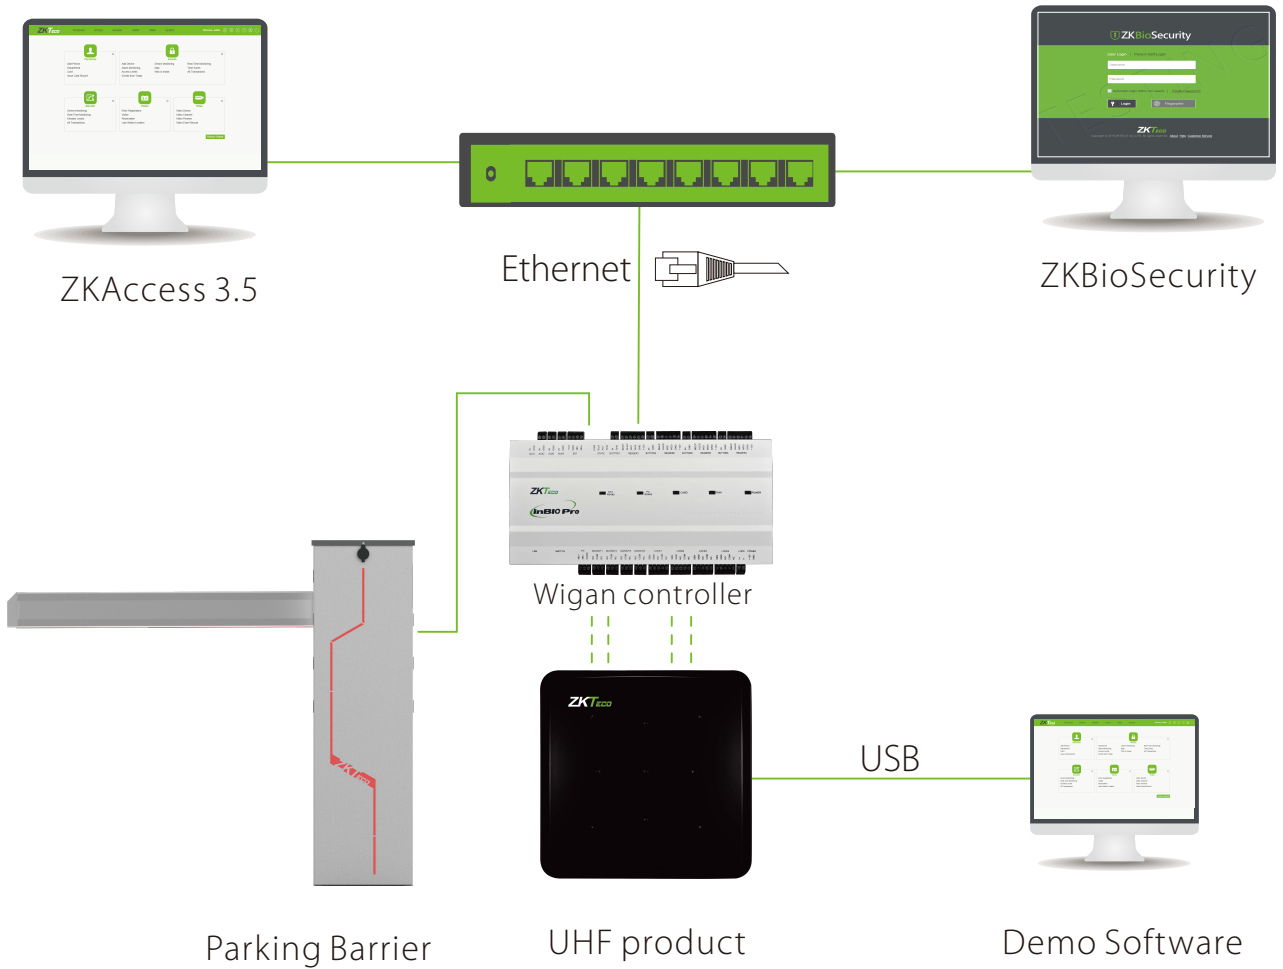

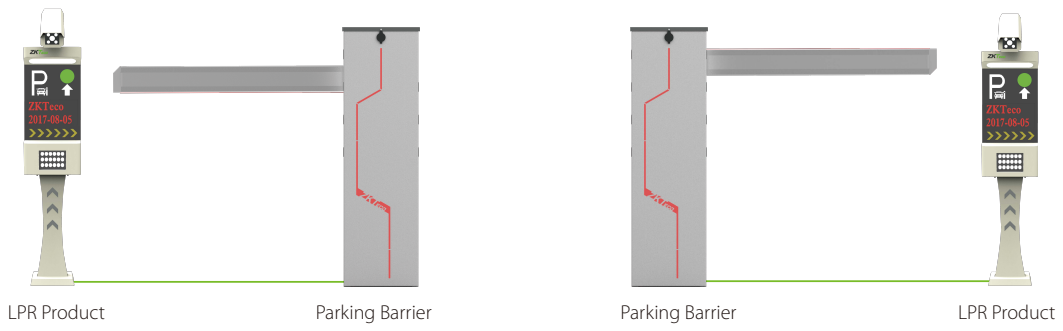

Workstation Computer




Main Database



Switch



Workstation Computer

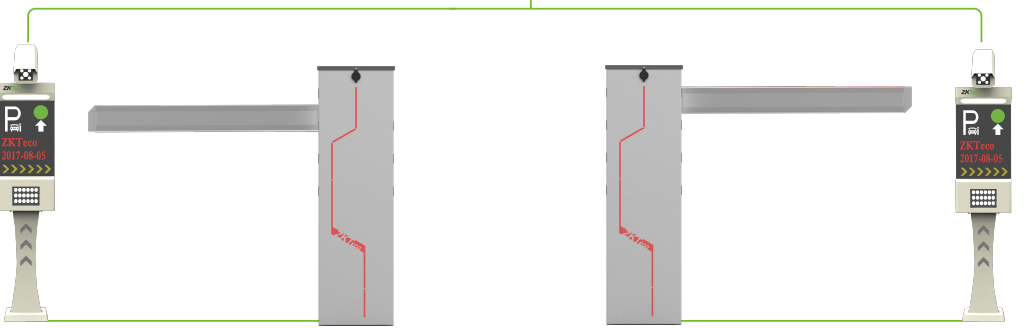

LPR Product

Parking Barrier

Parking Barrier

LPR Product

